




MIDWEST PETERBILT GROUP



Behnke Air Tilt Flatbed

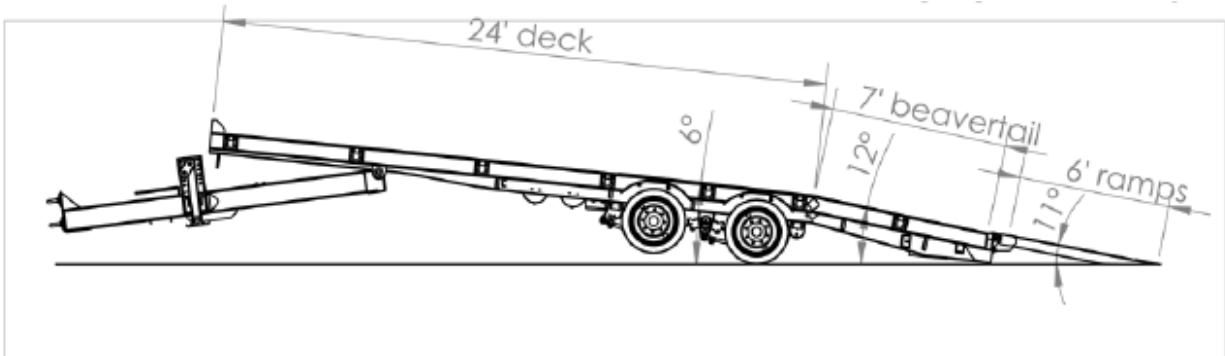

Behnke Air Tilt Flatbed Specifications

NOTE: shown above w/air ramp option

Frame:

- T-1 flange, 80K web
- 1 piece i-beam construction
- Dual speed semi-style landing gear jack

Hitch:

- 3" Adjustable pintle hitch (rated at 90,000lbs)
- Grade 70 transporter safety chains

Axles:

- 40,000lb GVW
- (1) 20,000lb axle with ABS air brakes, spring ride
- (1) 20,000lb axle with non-ABS air brakes, spring ride
- 3rd axle available
- Air brakes
- Air ride suspension optional

Wheels & Tires:

- 235/75R17.5" load range H tire (16-ply)
- Spare wheel & tire optional

Deck:

- 24' bed length
- 8' 6" wide deck
- 33" loaded deck height, 35" unloaded deck height
- Oak deck
- Solid front rail
- 4" Jr. i-beam crossmembers on 14" centers
- 8" channel side rails
- ¼" steel over wheels
- D-rings every 4"
- Toolbox in tongue with lockable lid

Ankeny (Des Moines) • Council Bluffs (Omaha) • Lincoln • Norfolk • Sioux City



- 7' beavertail (traction bars optional)
- 6' self-cleaning angle iron ramps optional
- Dual air bag tilting system
- Dual air brake chamber locking system

Lights:


- Rubber mounted sealed LED lights
- Light plug holder
- Reflector Tape
- Mud Flaps

Finish:

- Zinc rich primed
- Powder Coated
- Standard colors: black, red, blue, gray, and yellowstone



MIDWEST PETERBILT GROUP

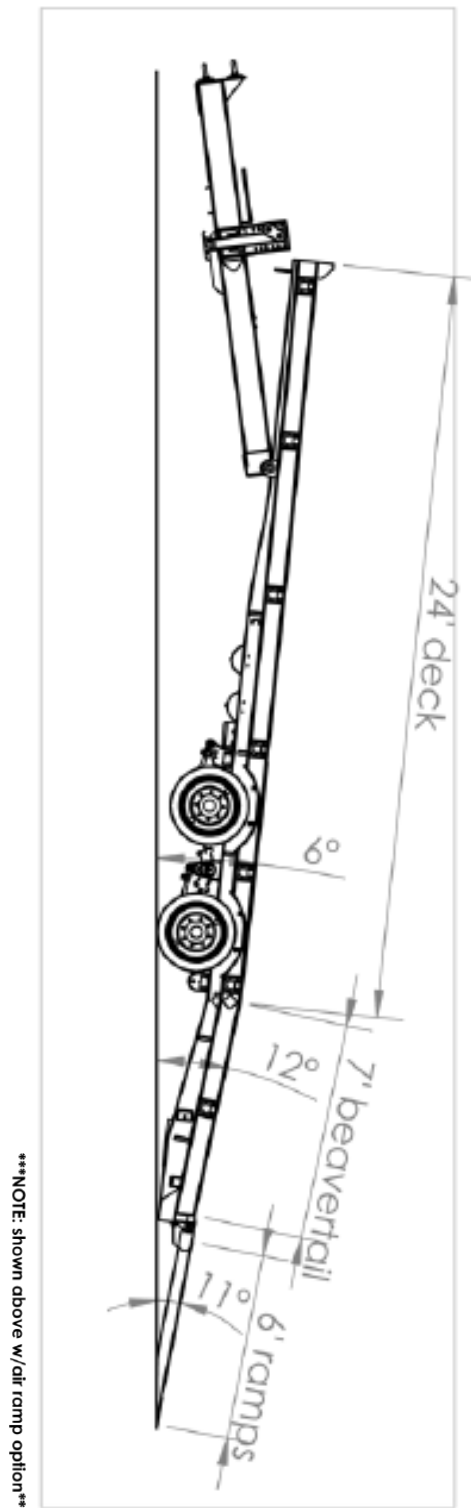

Ankeny (Des Moines) • Council Bluffs (Omaha) • Lincoln • Norfolk • Sioux City