




MIDWEST PETERBILT GROUP



Behnke Super Duty Flatbed

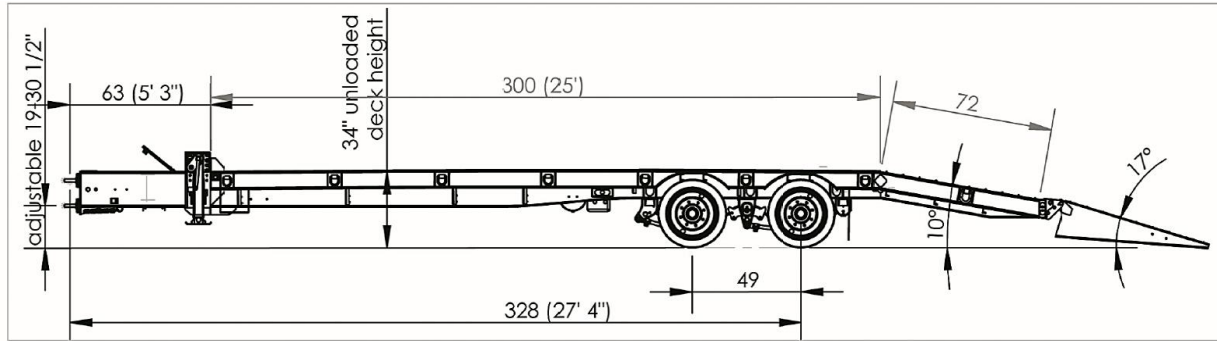

*Drawing is representative of dimensions available. Contact dealer for additional specs.

Behnke Super Duty Flatbed Specifications

Frame:

- T-1 flange, 80K web
- 1 piece i-beam construction
- Dual speed semi-style landing gear jack

Hitch:

- 3" Adjustable pintle hitch (rated at 90,000lbs)
- Grade 70 transporter safety chains

Axles:

- 40,000lb GVW
- (1) 20,000lb axle with ABS air brakes, spring ride
- (1) 20,000lb axle with non-ABS air brakes, spring ride
- 3rd axle available
- Air brakes

Wheels & Tires:

- 235/75R17.5" load range H tire (16-ply)

Deck:

- Available in 21', 23', 25', and 27', lengths
- 8' 6" wide deck
- Approximately 34" loaded deck height
- Oak deck
- Solid front rail
- 4" Jr. i-beam crossmembers on 16" centers
- 8" channel side rails
- 1/4" steel over wheels
- D-rings every 4"
- Toolbox in tongue with lockable lid
- 6' self-cleaning angle iron beavertail (wood beavertail and double break beavertail available)

Ankeny (Des Moines) • Council Bluffs (Omaha) • Lincoln • Norfolk • Sioux City



- 6' self-cleaning angle iron ramps (spring loaded both directions) (air assist and hydraulic assist available, wood ramps available, hydraulic bi-fold ramps available)

Lights:


- Rubber mounted sealed LED lights
- Reflector Tape
- Mud Flaps

Finish:

- Zinc rich primed
- Powder Coated
- Standard colors: black, red, blue, gray, and yellowstone



MIDWEST PETERBILT GROUP

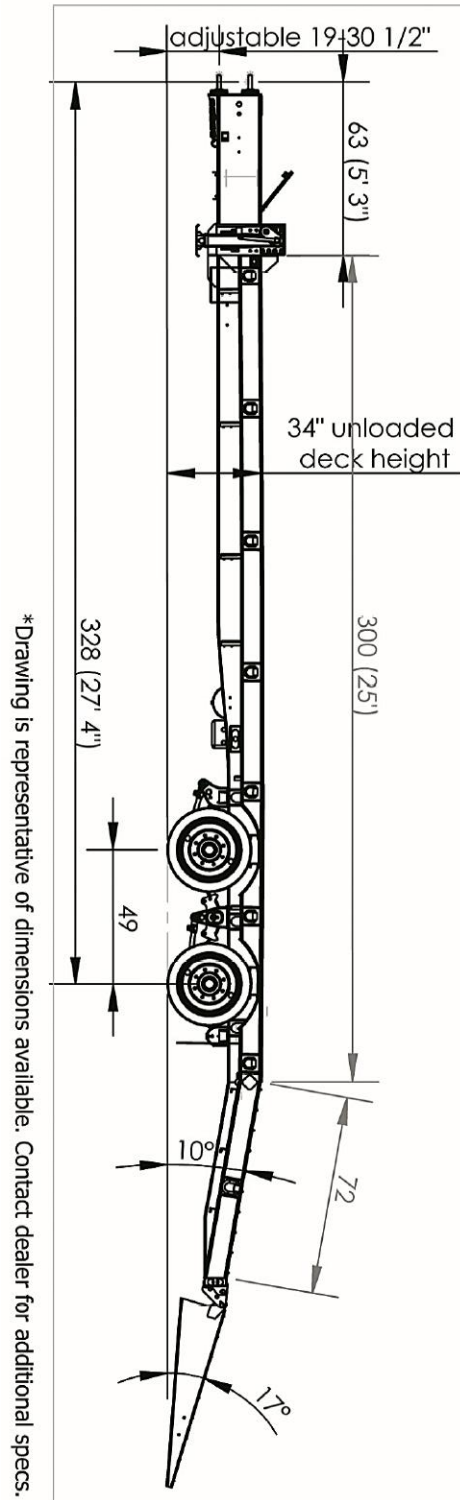

Ankeny (Des Moines) • Council Bluffs (Omaha) • Lincoln • Norfolk • Sioux City