






XL Specialized 60 SD3 Side Dump

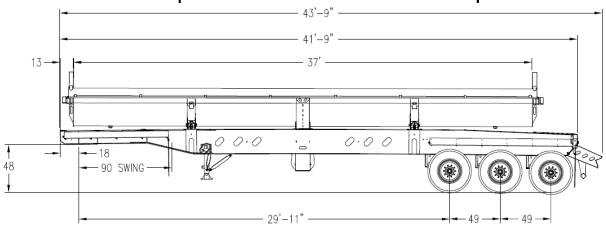

XL 60 SD3 Side Dump Specifications

Capacity:

60,000lb distributed overall

Overall Length & Width:

Overall length: 39' 8" (2-axle) Overall length: 41' 9" (3-axle)

Overall width: 102"

Frame:

- 18" kingpin setting
- 90" swing clearance
- 48" fifth wheel height
- 2 speed landing gear
- Grease zerks in fifth wheel plate
- Removable kingpin
- Dual intensity cluster lights
- Bolt-on high density poly fenders front and rear
- 6 lights per side
- Bolt-on removable push block
- Hydraulic control valve

Tub:

- 37' rolled tub
- Water level volume: 23 cubic yards
- Strike off volum: 33 cubic yards
- 1/4" AR450 steel
- 42° dump angle
- Aero Side Kick 2 mesh tarp







Suspension:

Air ride 260

Axles:

- (2) or (3) 25,000lb air ride
- 49" axle spacing
- 2S1M with spring brakes on 2 axles

Wheels & Tires:

- 8.25" X 22.5" steel wheels (aluminum wheels available)
- 11R22.5 tires

Lighting:

- 12V sealed Grote harness
- Rubber mounted LED lights
- 2 taillight package
- 2 clearance lights per side
- 1 mid-turn light per side
- 7 pole electric socket

Paint:

- Black, IH red, CAT yellow, and white available
- Air & electric done after paint

Paint Options:

- Non-standard paint colors
- Non-standard metallic paint
- Two-tone, tub and frame

Warranty:

- 2-year structural warranty
- 2-year paint warranty
- 1-year parts and components warranty







